

COM Express® Type6 Module

conga-TFS

Power efficient high-performance x86 processing

Unprecedented integrated graphics performance


High performance parallel processing support



Formfactor	COM Express™ Basic, (95 x 125 mm), Type 6 Connector Layout
CPU	AMD Embedded R-Series processors AMD Embedded R-464L with AMD Radeon™ HD 7660G Graphics (Quad-Core 2.3/3.2 GHz / 35W / PGA) AMD Embedded R-460H with AMD Radeon™ HD 7640G Graphics (Quad-Core 1.9/2.8 GHz / 35W / PGA) AMD Embedded R-272F with AMD Radeon™ HD 7520G Graphics (Dual-Core 2.7/3.2 GHz / 35W / PGA)
DRAM	Two 1.5V/1.35V DDR3 SO-DIMMs up to 1600MT/s and 8 GByte
Chipset	AMD A70M Controller Hub
Ethernet	Realtek RTL8111E GbE LAN Controller
I/O Interfaces	7x PCI Express™ 2.0 lane, PCI Express™ 2.0 x8 link, 4x SATA 6Gb/s with RAID 0/1, 4x USB 3.0, 4x USB 2.0, 2x Express™ Card, LPC bus, SDHC, I²C bus
Sound	High Definition Audio Interface
Graphics	High performance DirectX®11 GPU supports OpenCL™ 1.1 and OpenGL 4.2, Three Independent Display Controllers, Dedicated Hardware (UVD) for H.264 MPEG4 Part 2 VC-1 and MPEG2 decode Dedicated Hardware (VCE) assisted encoding of HD video streams to H.264
LVDS	18/24-bit Single/Dual Channel Interface, resolutions up to 1920X1200@60Hz, VESA standard or JEIDA data mapping, Automatic Panel Detection via EDID/EPI
DisplayPort	Three DisplayPort 1.2
HDMI or DVI	Two Ports support one HDMI1.4a and two Single-Link DVI
VGA	One Port supports resolutions up to 1920x1600@60Hz
congatec Board Controller	Multi Stage Watchdog, non-volatile User Data Storage, Manufacturing and Board Information, Board Statistics, BIOS Setup Data Backup, I2C bus, Power Loss Control
Embedded BIOS Features	AMI Aptio® UEFI firmware
Security	The conga-TFS can be optionally equipped with a discrete "Trusted Platform Module" (TPM). It is capable of calculating efficient hash and RSA algorithms with key lengths up to 2,048 bits and includes a real random number generator. Security sensitive applications such as gaming and e commerce will benefit also with improved authentication, integrity and confidence levels.
Power Management	ACPI 3.0 with battery support
Operating Systems	Microsoft® Windows7, Microsoft® Windows XP, Linux 2.6
Power Consumption	Typ. application: TBD., see manual for full details, CMOS Battery Backup
Temperature	Operating: 0 .. +60°C Storage: -20 .. +80°C
Humidity	Operating: 10 - 90% r. H. non cond. Storage: 5 - 95% r. H. non cond.
Size	95 x 125 mm (3.74" x 4.92")

© 2012 congatec AG. All rights reserved. All data is for information purposes only. Although all the information contained within this document is carefully checked no guarantee of correctness is implied or expressed. AMD, Fusion and eOnia are registered trademarks of AMD. Microsoft®, Windows®, Windows NT®, Windows CE and Windows XP® are registered trademarks of Microsoft corporation. ETX is a registered trademark of Kontron Embedded Modules GmbH.
Rev. August 7, 2012 KS

Block Diagram

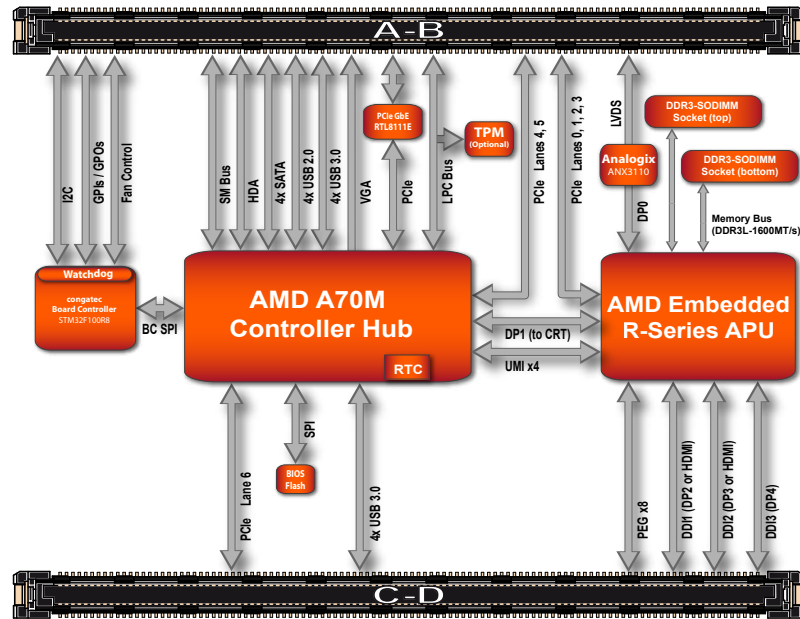

Order Information

Article	PN	Description
conga-TFS/R-464L	041101	COM Express Type 6 Basic Module with AMD Embedded R-464L Processor Quad Core 2.3GHz/3.2GHz in socket with 1MB L2 cache and 1600MT/s DDR3 SODIMM memory interface for up to 16GB and AMD A70M Controller Hub.
conga-TFS/R-460H	041102	COM Express Type 6 Basic Module with AMD Embedded R-460H Processor Quad Core 1.9GHz/2.8GHz in socket with 1MB L2 cache and 1600MT/s DDR3 SODIMM memory interface for up to 16GB and AMD A70M Controller Hub.
conga-TFS/R-272F	041103	COM Express Type 6 Basic Module with AMD Embedded R-272F Processor Dual Core 2.7GHz/3.2GHz in socket with 512KB L2 cache and 1600MT/s DDR3 SODIMM memory interface for up to 16GB and AMD A70M Controller Hub.
conga-TFS/HSP-VC-B	041150	Standard heatspreader for high performance COM Express module conga-TFS with integrated vapor chamber. All standoffs are with 2.7mm bore hole.
conga-TFS/HSP-VC-T	041151	Standard heatspreader for high performance COM Express module conga-TFS with integrated vapor chamber. All standoffs are M2.5mm thread.
conga-TFS/CSP-VC-B	041152	Standard passive cooling solution for high performance COM Express module conga-TFS with integrated vapor chamber, 15mm fins and 20mm overall heat sink height. All standoffs are with 2.7mm bore hole.
conga-TFS/CSP-VC-T	041153	Standard passive cooling solution for high performance COM Express module conga-TFS with integrated vapor chamber, 15mm fins and 20mm overall heat sink height. All standoffs are M2.5mm thread.
conga-TFS/CSA-VC-B	041154	Standard active cooling solution for high performance COM Express module conga-TFS with integrated vapor chamber, 15mm fins, 20mm overall heat sink height and integrated 12V fan. All standoffs are with 2.7mm bore hole.
conga-TFS/CSA-VC-T	041155	Standard active cooling solution for high performance COM Express module conga-TFS with integrated vapor chamber, 15mm fins, 20mm overall heat sink height and integrated 12V fan. All standoffs are M2.5mm thread.
DDR3-SODIMM-1600 (2GB)	068767	DDR3 SODIMM memory module with 1600 MT/s (PC3-12800) and 2GB RAM
DDR3-SODIMM-1600 (4GB)	068770	DDR3 SODIMM memory module with 1600 MT/s (PC3-12800) and 4GB RAM
DDR3-SODIMM-1600 (8GB)	068780	DDR3 SODIMM memory module with 1600 MT/s (PC3-12800) and 8GB RAM

Engineering Tools / Accessories for COM Express®

conga-TEVAL	065800	Evaluation carrier board for Type 6 COM-Express-modules
conga-Cdebug	047854	COM-Express debugging platform. Including cable for COM, PS/2 and VGA.
conga-LDVI/EPI	011115	LVDS to DVI converter board for digital flat panels with onboard EEPROM
conga-HDMI/Display Port adapter	500014	The conga-HDMI/DisplayPort adapter is used to convert the chipset graphic ports Port-B, Port-C and Port-D to the HDMI or DisplayPort Interface
DVI-D ADD2 Card	058500	ADD2 display adapter card with single DVI-D digital output. Suitable for all Intel based platforms that support Serial Digital Display Outputs (SDVO) on the standard, x16 PCI Express Graphics (PEG) port.
Dual DVI-D ADD2 Card	013226	ADD2 display adapter card with dual independent DVI-D output. Suitable for all Intel based platforms that support Serial Digital Display Outputs (SDVO) on the standard, x16 PCI Express Graphics (PEG) port.
COM-Express-carrierboard-Socket-5	400007	Connector for COM-Express carrier boards, height 5mm, packing unit 4 pieces
COM-Express-carrierboard-Socket-8	400004	Connector for COM-Express carrier boards, height 8mm, packing unit 4 pieces